

Please type a sign(+) inside this box



PTO/SB/05 (2/98)

Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR § 1.53(b))

Attorney Docket No. 1487.0160000
First Inventor or Application Identifier Paul FEBVRE
Title Communication Methods and Apparatus
Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☐ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification [Total Pages 35]

(preferred arrangement set forth below)

- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 10]

4. ☐ Oath or Declaration [Total Pages]

a. ☐ Newly executed (original or copy)

b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
[Note Box 5 below]

i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR §§ 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)

7. Nucleotide and/or Amino Acid Sequence Submission applicable, all necessary)

a. ☐ Computer Readable Copy

b. ☐ Paper Copy (identical to computer copy)

c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))

9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)

10. ☐ English Translation Document (if applicable)

11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations

12. ☒ Preliminary Amendment

13. ☐ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)

14. ☐ *Small Entity Statement(s) ☐ Statement filed in prior application, Status still proper and desired
(PTO/SB/09-12)

15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)

16. ☒ Other. 37 C.F.R. § 1.136(a)(3) Authorization

☐ Other:

*NOTE FOR ITEMS 1 & 14 IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-Part (CIP) of prior application No: /

Prior application information: Examiner Group/Art Unit:

18. CORRESPONDENCE ADDRESS

☐ Customer Number
or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence
address below

NAME	STERNE, KESSLER, GOLDSTEIN & FOX P.L.L.C.				
	Attorneys at Law				
ADDRESS	Suite 600, 1100 New York Avenue, N.W.				
CITY	Washington	STATE	DC	ZIP CODE	20005-3934
COUNTRY	USA	TELEPHONE	(202) 371-2600	FAX	(202) 371-2540

NAME (Print/Type)	Edward J. Kessler	Registration No. (Attorney/Agent)	25,688
SIGNATURE		Date	11/15/99

Burden Hour Statement: this form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

STERNE, KESSLER, GOLDSTEIN & FOX P.L.L.C.

ATTORNEYS AT LAW

1100 NEW YORK AVENUE, N.W., SUITE 600
WASHINGTON, D.C. 20005-3934

(202) 371-2600

FACSIMILE (202) 371-2540, (202) 371-6566

ROBERT GREENE STERNE
EDWARD J. KESSLER
JORGE A. GOLDSTEIN
SAMUEL L. FOX
DAVID K.S. CORNWELL
ROBERT W. ESMOND
TRACY-GENE G. DURKIN
MICHELE A. CIMBALA
MICHAEL B. RAY
ROBERT E. SOKOHL

ERIC K. STEFFE
MICHAEL O. LEE
STEVEN R. LUDWIG
JOHN M. COVERT*
LINDA E. ALCORN
RAZ E. FLESHNER
ROBERT C. MILLONIG
MICHAEL V. MESSINGER
JUDITH U. KIM
TIMOTHY J. SHEA, JR.

DONALD R. MCPHAIL
PATRICK E. GARRETT
STEPHEN G. WHITESIDE
JEFFREY T. HELVEY*
HEIDI L. KRAUS
JEFFREY R. KURIN
RAYMOND MILLIEN
PATRICK D. O'BRIEN
LAWRENCE B. BUGAISKY
CRYSTAL D. SAYLES*

EDWARD W. YEE
ALBERT L. FERRO*
DONALD R. BANOWIT*
PETER A. JACKMAN
MOLLY A. MCCALL
TERESA U. MEDLER
JEFFREY S. WEAVER
KRISTIN K. VIDOVICH
ANDREW S. ROBERTS*
KENDRICK P. PATTERSON*

DONALD J. FEATHERSTONE**
KAREN R. MARKOWICZ**
GRANT E. REED**
SUZANNE E. ZISKA**
BRIAN J. DEL BUONO**
VINCENT L. CAPUANO**
ANDREA J. KAMAGE**
NANCY J. DEGEN**

ROBERT H. BENSON*
OF COUNSEL

*BAR OTHER THAN D.C.
**REGISTERED PATENT AGENTS

U.S. PTO
09/439346

11/15/99

November 15, 1999

WRITER'S DIRECT NUMBER:
(202) 371-2550

INTERNET ADDRESS:
EKESLER@SKGF.COM

Assistant Commissioner for Patents
Washington, D.C. 20231

Box Patent Application

Re: U.S. Non-Provisional Utility Patent Application under 37 C.F.R. § 1.53(b)
Appl. No. To Be Assigned; Filed: Herewith
For: **Communications Methods and Apparatus**
Inventors: Febvre *et al.*
Our Ref: 1487.0160000

Sir:

The following documents are forwarded herewith for appropriate action by the U.S.
Patent and Trademark Office:

1. U.S. Utility Patent Application entitled:

Communication Methods and Apparatus

and naming as inventors:

Paul FEBVRE
David Denis MUDGE
Edward Arthur JONES
Panagiotis FINES

the application comprising:

11/15/99
U.S. PTO
09/439346

11/15/99
U.S. PTO
09/439346

Assistant Commissioner for Patents
November 15, 1999
Page 2


- a. A specification containing:
 - (i) 19 pages of description prior to the claims;
 - (ii) 5 pages of claims (25 claims);
 - (iii) a one (1) page abstract;
- b. 10 sheets of drawings: (Figures 1-10C);
- 2. USPTO Utility Patent Application Transmittal Form PTO/SB/05;
- 3. Preliminary Amendment;
- 4. 37 C.F.R. § 1.136(a)(3) Authorization to Treat a Reply As Incorporating An Extension of Time; and
- 5. Two (2) return postcards.

It is respectfully requested that, of the two attached postcards, one be stamped with the filing date of these documents and returned to our courier, and the other, prepaid postcard, be stamped with the filing date and unofficial application number and returned as soon as possible.

This patent application is being submitted under 37 C.F.R. § 1.53(b) without Declaration and without filing fee.

Respectfully submitted,

STERNE, KESSLER, GOLDSTEIN & FOX P.L.L.C.

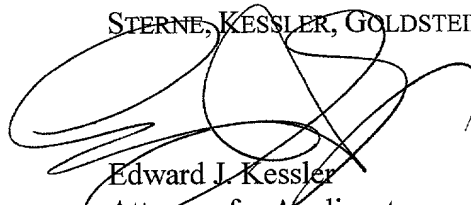

Edward J. Kessler
Attorney for Applicants
Registration No. 25,688

EJK:vcf

P:\USERS\Vfudd\EJK\1487\0160000 transmittal
SKGF Rec. 9/22/98dcw

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of:

Febvre *et al.*

Appl. No. To Be Assigned

Filed: Herewith

For: **Communication Methods and
Apparatus**

Art Unit: To Be Assigned

Examiner: To Be Assigned

Atty. Docket: 1487.0160000

Preliminary Amendment

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Preliminary to any action on the merits, Applicants respectfully request the following changes be made:

In the Claims:

Amend the claims as follows:

Claim 14, line 1, change "13" to --12--;

Cancel claims 16, 17 and 23-25 without prejudice or disclaimer.


Remarks

Claims 1-15 and 18-22 are presented for consideration in this application.

Prompt and favorable action is respectfully requested.

Respectfully submitted,

STERNE, KESSLER, GOLDSTEIN & FOX P.L.L.C.

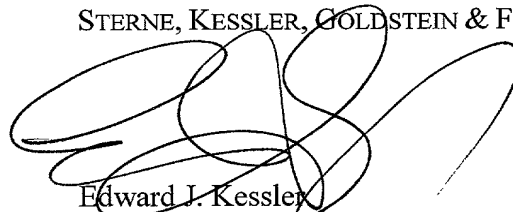

Edward J. Kessler
Attorney for Applicants
Registration No. 25,688

Date: 11/15/99

1100 New York Avenue, N.W.
Suite 600
Washington, D.C. 20005-3934
(202) 371-2600

P:\USERS\vludd\EJK\1487\0160000 preliminary
SKGF1/25/98 dew

COMMUNICATION METHODS AND APPARATUS

The present invention relates to communications apparatus and methods, particularly but not exclusively for wireless communications, particularly but not exclusively via satellite.

5 A problem associated with communications systems in which different transmitters share a time-divided channel resource is that timing misalignments may cause interference between the transmitters. The misalignments may be caused by drift in the transmitter clocks, or variations in the propagation delay from different transmitters to a common receiver. In time-divided multiple access (TDMA) channels, a guard band is usually
10 provided between adjacent time slots, so that timing differences of less than the guard band time between transmissions in adjacent slots do not cause interference. However, the guard bands occupy bandwidth which could otherwise be used to carry traffic, so reliance on guard bands alone to avoid interference is not suitable for systems where a high bandwidth channel is shared by many transmitters.

15 The document US 5790939 describes a TDMA based satellite communication system including a timing correction protocol. The system broadcasts timing corrections to mobile terminals. Residual errors in the timing of individual terminals are corrected following transmission by the mobile terminals in a contention access channel. A gateway measures the residual timing error and reports the error back to the relevant mobile
20 terminal.

Another problem associated with bursts in TDMA channels is that, if adjacent bursts do overlap, the interference between the bursts generally prevents either from being demodulated and decoded successfully. Burst formats for each time slot may include a unique word which aids acquisition of the burst, as described for example in US 5661764,
25 but the advantage of the unique word is lost if the burst interferes with an adjacent burst.

The document GB 2270815 describes a cellular mobile radio system with a packet reservation multiple access protocol, in which user traffic can be carried by both single and double slots, allocated dynamically by the base station according to load requirements. However, if the slot allocation is entirely flexible and can include slots of differing lengths,
30 the timing alignment of bursts in those slots becomes complex.

According to aspects of the present invention, there is provided a timing correction method in a communications system, in which transceivers transmit short bursts to a base station, which determines timing corrections from the time of receipt of the bursts and transmits the timing corrections to the respective transceivers.

5 In one aspect, the base station indicates to the transceivers a plurality of time slots; each transceiver selects one of the time slots at random, formats a burst including a indicator of the selected time slot and transmits the burst in that slot. The base station can therefore determine the timing with which each transceiver transmitted the burst, but the probability of collision between bursts is reduced since they are spread across the plurality
10 of time slots.

In another aspect, the base station transmits to each transceiver a timing uncertainty value, which determines how the timing correction will be modified by the transceiver as the interval since last receiving a timing correction increases. Preferably, if the modification determined by the timing uncertainty value increases beyond a predetermined
15 threshold, the transceiver inhibits transmission other than to request a timing correction. These measures advantageously reduce the likelihood of interference between slots, due to timing misalignment.

The above aspects of the present invention extend individually to those parts of the method which are carried out by the transceiver, those parts which are carried out by the
20 network with which the transmitter communicates, and apparatus arranged to carry out those individual parts of the method.

According to another aspect of the present invention, there is provided a signal having a format comprising a first unique word, a content field and a second unique word, in that order. Preferably, there are no other fields in the burst before the first or after the
25 second unique word which are necessary for the demodulation and decoding of the burst; this has the advantage that, if either the beginning or the end of the burst overlaps with another burst, it may still be possible to read the data content of the burst correctly. The content field may carry user data and/or signalling information. There may be an additional field before the first unique word and/or after the second unique word, but these are
30 preferably auxiliary fields which are not essential to the decoding of the content field. For example, there may be a constant power preamble at the beginning of the burst to assist

with power control in the transmitter. This aspect of the present invention extends to methods of formatting and/or transmitting such a signal, and apparatus arranged to perform such methods.

According to another aspect of the present invention, there is provided a TDMA
5 channel format which can accommodate both short and long bursts in a block format of constant periodicity.

Specific embodiments of the present invention will now be described with reference to the accompanying drawings, in which:

Figure 1 is a diagram of components of a satellite communication system
10 incorporating embodiments of the present invention;

Figure 2 shows the channels used for communication between the SAN and the MAN's in a packet data service implemented in the system of Figure 1;

Figure 3 is a diagram of transmitter and receiver channel units in a satellite access node (SAN) of the system of Figure 1;

15 Figure 4 is a diagram of transmitter and receiver channel units in a Mobile Access Node (MAN) of the system of Figure 1;

Figures 5a to 5d show the structure of one of the LESP channels of Figure 4;

Figure 6a shows the burst structure of a 5 ms burst in one of the MESP channels of Figure 4;

20 Figure 6b shows the burst structure of a 20 ms burst in one of the MESP channels of Figure 4;

Figure 7 is a timing diagram illustrating the operation of an initial timing correction protocol for correcting the timing of transmissions in the MESP channels;

Figure 8a is a timing diagram illustrating the timing of a transmission in one of the
25 MESP channels immediately following a timing correction;

Figure 8b is a timing diagram illustrating the timing of a transmission in one of the MESP channels at an interval after a timing correction, where there is timing uncertainty;

Figures 9a to 9c are timing diagrams showing different collision scenarios between bursts of a conventional format in adjacent TDMA slots; and

30 Figures 10a to 10c are timing diagrams showing the equivalent collision scenarios between bursts of a format according to an embodiment of the present invention.

System Overview

Figure 1 shows the principal elements of a satellite communications system in an embodiment of the present invention. A plurality of Mobile Access Nodes (MAN) 2 communicate via a satellite 4 with a satellite earth station, hereinafter referred to as a Satellite Access Node (SAN) 6. The satellite 4 may for example be an Inmarsat-3™ satellite, as described for example in the article 'Launch of a New Generation' by J R Asker, TRANSAT, Issue 36, January 1996, pages 15 to 18, published by Inmarsat, the contents of which are included herein by reference. The satellite 4 is geostationary and projects a plurality of spot beams SB (five spot beams in the case of an Inmarsat-3™ satellite) and a global beam GB, which encompasses the coverage areas of the spot beams SB, on the earth's surface. The MAN's 2 may be portable satellite terminals having manually steerable antennas, of the type currently available for use with the Inmarsat mini-M™ service but with modifications as described hereafter. There may be a plurality of SAN's 6 within the coverage area of each satellite 4 and capable of supporting communications with the MAN's 2 and there may also be further geostationary satellites 4 with coverage areas which may or may not overlap that of the exemplary satellite 4. Each SAN 6 may form part of an Inmarsat Land Earth Station (LES) and share RF antennas and modulation/demodulation equipment with conventional parts of the LES. Each SAN 6 provides an interface between the communications link through the satellite 4 and one or more terrestrial networks 8, so as to connect the MAN's 2 to terrestrial access nodes (TAN) 10, which are connectable directly or indirectly through further networks to any of a number of communications services, such as Internet, PSTN or ISDN-based services.

Channel Types

Figure 2 shows the channels used for communication between a sample one of the MAN's 2 and the SAN 6. All communications under this packet data service from the MAN 2 to the SAN 6 are carried on one or more slots of one or more TDMA channels, referred to as MESP channels (mobile earth station - packet channels). Each MESP channel is divided into 40 ms blocks, divisible into 20 ms blocks. Each 20 ms block carries either one 20 ms burst or four 5 ms bursts, in a format which will be described below.

All communications under this packet data service from the SAN 6 to the MAN 2 are carried on one or more slots of one or more TDM channels, referred to as LESP channels (land earth station - packet channels). The slots are each 80 ms long, and comprise two subframes of equal length.

5 For the purposes of channel set-up and other network signalling, the MAN 2 also communicates with a network co-ordination station (NCS) 5, as is known in the Inmarsat Mini-M™ service. The SAN 6 communicates through the network 8 to a regional land earth station (RLES) 9 which communicates with the NCS 5 so as to perform channel set-up and other network signalling.

10

Satellite Link Interface

The present embodiments concern in particular a set of protocols and algorithms for the interface over the satellite link between the MAN's 2 and the SAN 6 to which the MAN's 2 are connected. This interface can be considered as a series of communications
15 layers: a physical layer, a medium access control (MAC) layer and a service connection layer.

SAN Channel Unit

Figure 3 shows the functions within the SAN 6 of a transmitter channel unit ST,
20 which performs the transmission of data packets over a single frequency channel of the satellite link, and a receiver channel unit SR, which performs the reception of data packets over a single frequency channel of the satellite link. Preferably, the SAN 6 includes multiple transmitter channel units ST and receiver channel units SR so as to be able to provide communications services to a sufficient number of MAN's 2.

25 A hardware adaptation layer (HAL) 10 provides an interface between the channel units and higher level software, and controls the settings of the channel units. In the transmitter channel unit ST, the HAL 10 outputs data bursts Td which are scrambled by a scrambler 12, the output timing of which is controlled by a frame timing function 14 which also provides frame timing control signals to the other transmitter channel units ST. The
30 scrambled data bursts are then redundancy encoded by an encoder 16, by means for example of a turbo encoding algorithm as described in PCT/GB97/03551.

The data and parity bits are output from the encoder 16 to a transmit synchronising function 18 which outputs the data and parity bits as sets of four bits for modulation by a 16QAM modulator 20. Unique word (UW) symbols are also input to the modulator 20 according to a slot format which is described below. The output timing of the encoder 16, transmit synchroniser 18 and modulator 20 is controlled by the HAL 10, which also selects the frequency of the transmit channel by controlling a transmit frequency synthesiser 22 to output an upconversion frequency signal. This frequency signal is combined with the output of the modulator 20 at an upconverter 24, the output of which is transmitted by an RF antenna (not shown) to the satellite 4.

In the receiver channel unit SR, a frequency channel is received by an RF antenna (not shown) and downconverted by mixing with a downconversion frequency signal at a downconverter 26. The downconversion frequency signal is generated by a reception frequency signal synthesiser 28, the output frequency of which is controlled by the HAL 10.

In order to demodulate the received bursts correctly, the timing of reception of the bursts is predicted by a receive timing controller 29, which receives the frame timing control information from the frame timing function 14 and parameters of the satellite 4 from the HAL 10. These parameters define the position of the satellite 4 and of its beams and allow the timing of arrival of data bursts from the MAN's 2 to the SAN 6 to be predicted. The propagation delay from the SAN 6 to the satellite 4 varies cyclically over a 24 hour period as a result of the inclination of the satellite's orbit. This delay variation is similar for all of the MAN's 2 and is therefore used to modify the reference timing of the MESP channels, so that the timing of the individual MAN's 2 does not need to be modified to compensate for variations in satellite position.

The predicted timing information is output to each of the receive channel units SR. The received bursts are of either 5 ms or 20 ms duration according to a scheme controlled by the SAN 6. The HAL 10 provides information about the expected slot types to a slot controller 32, which also receives information from the receive timing controller 29.

Figure 3 shows separate reception paths for 5 ms and 20 ms bursts; references to functions on each of these paths will be denoted by the suffixes *a* and *b* respectively. The slot controller 32 selects which reception path to use for each received burst according to

the predicted length of the burst. The burst is demodulated by a 16QAM demodulator 34a/34b and the timing of the burst is acquired by a UW acquisition stage 36a/36b. Once the start and end of the burst is determined, the burst is turbo-decoded by a decoder 38a/38b and descrambled by a descrambler 40a/40b. The recovered 5 or 20 ms data burst is then received by the HAL 10.

MAN Channel Unit

Figure 4 shows the functions within one of the MAN's 2 of a receiver channel unit MR and a transmitter channel unit MT. The MAN 2 may have only one each of the receiver and transmitter channel unit, for reasons of compactness and cost, but if increased bandwidth capacity is required, multiple receiver and transmitter channel units may be incorporated in the MAN 2.

In the receiver channel unit MR a signal is received by an antenna (not shown) and down-converted by a down-converter 42 which receives a down-conversion frequency signal from a receive frequency signal synthesiser 44, the frequency of which is controlled by an MAN hardware adaptation layer 46. The down-converted signal is demodulated by a 16QAM demodulator 48 which outputs the parallel bit values of each symbol to a UW detection stage 50, where the timing of the received signal is detected by identifying a unique word (UW) in the received signal. The timing information is sent to a frame and symbol timing unit 52 which stores timing information and controls the timing of the later stages of processing of the signal, as shown in Figure 4. Once the block boundaries of the received data have been detected, the received blocks are turbo decoded by a decoder 54, descrambled by a descrambler 56 and output as received bursts to the HAL 46.

In the transmitter channel unit MT, data for bursts of 5 or 20 ms duration are output from the HAL 46. Separate paths identified by the suffixes *a* and *b* are shown in Figure 4 for the 5 and 20 ms bursts respectively. The data is scrambled by a scrambler 48a/48b and encoded by a turbo encoder 50a/50b. Unique Words (UW) are added as dictated by the burst format at step 52a/52b and the resultant data stream is mapped onto the transmission signal set at step 54a/54b and filtered at step 56a/56b. The transmission timing is controlled at a transmission timing control step 58a/58b. At this step, the TDMA slot position is controlled by a slot control step 60 according to a designated slot position indicated by the

HAL 46. A timing offset is output by the HAL 46 and is supplied to a timing adjustment step 62 which adjusts the timing of the slot control step 60. This timing offset is used to compensate for variations in propagation delay caused by the relative position of the MAN 2, the satellite 4 and the SAN 6 and is controlled by a signalling protocol, as will be described in greater detail below. The sets of data bits are output at a time determined according to the slot timing and the timing adjustment to a 16QAM modulator 64. The modulated symbols are upconverted by an upconverter 66 to a transmission channel frequency determined by a frequency output by a transmission frequency synthesiser 68 controlled by the HAL 46. The upconverted signal is transmitted to the satellite 4 by an antenna (not shown).

LESP Channel Format

Figure 5a shows the frame structure of one of the LESP channels. Each frame LPF has a duration of 80 ms and has a header consisting of a constant unique word UW which is the same for all frames. The unique word UW is used for frame acquisition, to resolve phase ambiguity of the output of the demodulator 48 and to synchronise the descrambler 56 and the decoder 54.

Figure 5b shows the structure of each frame, which consists of the unique word UW of 40 symbols, followed by 88 blocks of 29 symbols each followed by a single pilot symbol PS, terminating in 8 symbols so as to make up the total frame length to 2688 symbols, of which 2560 are data symbols. These data symbols are divided, as shown in Figure 5c, into two subframes SF1, SF2 each encoded separately by the encoder 16, each of 5120 bits, making 1280 symbols. The encoder 16 has a coding rate of 0.509375, so that each subframe is encoded from an input block IB1, IB2 of 2608 bits, as shown in Figure 5d. This structure is summarised below in Table 1:

Table 1: LESP Frame Format

Modulation	16QAM
Data Rate (kbit/s)	65.2
Interface frame length (ms)	80
Interface Frame Size (bits)	5120
Subframe length (ms)	40
Input Bits per Subframe	2608
Coding Rate	0.509375
Output Bit per Subframe	5120
Output Symbol Per Subframe	1280
Frame Length (ms)	80
Data Symbol per Frame	2560
Pilot Symbol Insertion Rate	$1/(29+1)$
Pilot Symbols per Frame	88
UW symbols	40
Frame Size	2688
Symbol Rate (ksym/s)	33.6

MESP Channel Format

The MESP channel structure is based on 40 ms blocks with a channel timing
 5 referenced to the timing of the associated LESP channel as received by the MAN's 2. Each
 40 ms block can be divided into two 20 ms slots, each of which can be further divided into
 four 5 ms slots, and the division of each block into slots is determined flexibly by higher
 level protocols. Figure 6a shows the format of a 5 ms burst, consisting of a pre-burst guard
 time G1 of 6 symbols, a preamble CW of 4 symbols, an initial unique word UW1 of 20
 10 symbols, a data subframe of 112 symbols, a final unique word UW2 of 20 symbols and a
 post-burst guard time G2 of 6 symbols.

The preamble CW is not intended for synchronisation purposes by receivers (for
 example, the demodulators 30a, 30b) but conveniently provides a constant power level
 signal to assist the automatic level control of a high-power amplifier (HPA, not shown) in
 15 the transmitting MAN 2. In one example, each of the symbols of the preamble CW has the

value (0,1,0,0). In an alternative format, the preamble may consist of less than 4 symbols and the symbol times not used by the preamble CW are added to the pre-burst and post-burst guard times G1, G2. For example, the preamble CW may be omitted altogether and the pre-and post-burst guard times increased to 8 symbols each.

- 5 The unique words include only the symbols (1,1,1,1), which is mapped onto a phase of 45° at maximum amplitude, and (0,1,0,1), which is mapped onto a phase of 225° at maximum amplitude. Hence, the unique words are effectively BPSK modulated, although the symbols are modulated by the 16QAM modulator 64. Indicating the (1,1,1,1) symbol as (1) and the (0,1,0,1) symbol as (0), the initial unique word UW1 comprises the
- 10 sequence 10101110011111100100, while the final unique word UW2 comprises the sequence of symbols 10111011010110000111.

The 5 ms burst is designed for carrying short signalling messages or data messages; the structure is summarised below in Table 2:

15

Table 2 - 5 ms Burst Structure

Modulation	16QAM
Input Bits per Burst	192
Coding rate	3/7
Output Bits per Burst	448
Output Symbols per Subframe	112
Preamble	4
Initial UW (symbols)	20
Final UW (symbols)	20
Total symbols	152
Total Guard Time (symbols)	12
Symbol Rate (ksym/s)	33.6
Slot Length (ms)	5

Figure 6b shows the structure of a 20 ms burst of the MESP channel. The same reference numerals will be used to denote the parts of the structure corresponding to those of the 5 ms burst. The structure consists of a pre-burst guard time G1 of 6 symbols, a

preamble CW of 4 symbols, an initial unique word UW1 of 40 symbols, a data subframe of 596 symbols, a final unique word of 20 symbols and a post-burst guard time G2 of 6 symbols. The structure is summarised below in Table 3:

Table 3 - 20 ms Burst Structure

Modulation	16QAM
Input Bits per Burst	1192
Coding rate	1/2
Output Bits per Burst	2384
Output Symbols per Subframe	596
Preamble	4
Initial UW (symbols)	40
Final UW (symbols)	20
Total symbols	660
Total Guard Time (symbols)	12
Symbol Rate (ksym/s)	33.6
Slot Length (ms)	20

5

The preamble CW has the same form and purpose as that of the 5 ms burst. The initial unique word UW1 comprises the sequence:

0000010011010100111000010001111100101101

while the final unique word UW2 comprises the sequence 11101110000011010010, using

10 the same convention as that of the 5 ms burst.

MESP Timing Correction

As shown above, the MESP slot structure incorporates a very short guard time of about 0.24 ms at each end. However, the difference in the SAN 6 to MAN 2 propagation delay between the MAN 2 being at the sub-satellite point and at the edge of coverage is
 15 about 40 ms for a geostationary satellite, so the position of each MAN 2 will affect the timing of reception of transmitted bursts in the MESP channel, and may cause interference between bursts from MAN's 2 at different distances from the sub-satellite point. Moreover the satellite, although nominally geostationary, is subject to perturbations which introduce

a small inclination to the orbit and cause the distance between the satellite 4 and the SAN 6, and between the satellite 4 and the MAN 2, to oscillate. Although the position of the SAN 6 is fixed and that of the satellite 4 can be predicted, the MAN's are mobile and therefore their positions change unpredictably, and their clocks are subject to jitter and drift.

A timing correction protocol is used by the SAN 6 to measure the propagation delay from the MAN 2 and send a timing correction value to the MAN 2 to compensate for differences in propagation delay between the different MAN's 2, so as to avoid interference between bursts from different MAN's caused by misalignment with the slots. The protocol will now be illustrated with reference to the timing diagram of Figure 7.

Figure 7 shows LESP frames LPF including subframes SF1, SF2 and initial unique words UW. When the MAN 2 is switched on, or is able to acquire one of the LESP channels after an interval of not being able to do so, the MAN 2 receives (step 70) a 40 ms LESP subframe SF including return schedule information which dictates the slot usage of a corresponding MESP channel. Return schedule information is transmitted periodically with a periodicity controlled by the SAN 6. The subframe SF includes the designation of a block of at least nine contiguous 5 ms slots as a timing acquisition group consisting of random access slots not assigned to any specific MAN 2. The MESP return schedule to which the subframe SF relates begins 120 ms after the beginning of reception of the subframe SF. This 120 ms period allows 90 ms for the MAN 2 to demodulate the LESP subframe SF (step 72) and 30 ms for the MAN 2 to initialise itself for transmission (step 74).

At the beginning of the MESP return schedule there is allocated a timing allocation group of 5 ms slots. Initially, it is assumed that the MAN 2 has the maximum timing uncertainty of 40 ms, corresponding to eight 5 ms slots. Therefore, the MAN 2 can only transmit after the first eight slots of the timing acquisition group, and cannot transmit at all in acquisition groups containing less than nine slots, so as to avoid interfering with transmissions in slots preceding the timing acquisition group.

The MAN 2 randomly selects (step 78) one of the slots of the timing acquisition group following the first eight slots and transmits (step 79) a burst in the selected slot, the burst including an indication of the slot selected. In the example shown in Figure 7, the slots of the timing acquisition group are numbered from 0 to M-1, where M is the number

of slots in the timing acquisition group, and the number R , selected at random from 8 to $M-1$, is transmitted in the burst at step 79. The burst may also indicate the type of the mobile, such as land-based, maritime or aeronautical.

The SAN 6 receives and records the time of arrival of the burst transmitted by the
 5 MAN 2. From the slot number R indicated in the burst, the SAN 6 calculates the differential propagation delay to that MAN 2. Since the timing of transmission of the burst was $(120 + R \times 5)$ ms after the time of reception of the LESP subframe SF, the timing of reception T_R of the burst is approximately $(2 \times DP + C + 120 + 5 \times R)$ ms after the time of transmission of the LESP subframe LPSF, where DP is the differential propagation delay
 10 to that MAN 2 and C is a delay which is the same for all the MAN's in a group, and includes various factors such as the propagation delay to and from the satellite 4 and the retransmission delay of the satellite 4. Hence, in this example, the differential propagation delay is calculated as:

$$DP = T_R - C - 120 - 5 \times R \quad (1)$$

15 The SAN 6 then transmits to the MAN 2 a data packet indicating a timing correction offset X in the range 0 to 40 ms. The offset replaces the initial timing offset of 40 ms in step 76, for subsequent transmissions. The MAN 2 receives the timing correction offset and adjusts its transmission timing accordingly.

If the burst transmitted by the MAN 2 interferes with a burst transmitted by another
 20 MAN 2 also attempting to receive a timing correction, the SAN 6 may not be able to read the contents of either burst and in that case will not transmit a timing offset correction to either MAN 2. If the MAN 2 does not receive a timing offset correction from the SAN 6 within a predetermined time, the MAN 2 waits for a random interval within a predetermined range before attempting to transmit a burst in the next subsequently
 25 available timing acquisition group. The predetermined range of intervals is determined by a signalling packet transmitted by the SAN 6 which indicates maximum and minimum intervals to be observed by MAN's 2 after a first unsuccessful transmission before attempting retransmission, together with a further waiting interval to be added to the total waiting interval each time a further retransmission is made following an unsuccessful
 30 transmission.

Figure 8a illustrates the transmission timing of one of the MAN's 2 which has previously received a timing correction offset value X . As in Figure 7, the MAN 2 receives (step 80) the LESP subframe SF which includes return schedule information. The MAN 2 demodulates (step 82) the LESP subframe LPSF and initialises (step 84) its transmitting channel unit, during a total allotted time of 120 ms after the beginning of reception of the LESP subframe LPSF. The MAN 2 calculates the start of the MESP return schedule as being $(120 + X)$ ms from the beginning of reception of the subframe SF which carries the return schedule information. The MAN 2 therefore waits for the timing offset period X (step 86) after the end of the 120 ms period before being able to transmit.

In this example, the return schedule dictated by the LESP subframe LPSF includes a four 5 ms slots, followed by a 20 ms slot. If the MAN 2 has been allocated a 20 ms slot, then it will transmit (step 88) in the designated 20 ms slot; if the MAN 2 has been allocated a 5 ms slot, then it will transmit in the designated 5 ms slot. Alternatively, if the 5 ms slots are designated as being random access slots and the MAN 2 has a short packet that is due to be sent to the SAN 6, the MAN 2 selects one of the four slots at random and transmits in that slot (step 89).

If the SAN 6 detects from the transmission by the MAN 2 that a correction in the timing offset is needed, for example if the time between the start of the burst and the slot boundary as measured by the SAN 6 is less than a predetermined number of symbols, the SAN 6 indicates a new timing correction to the MAN 2 in a subsequent data packet. This may be indicated as an absolute timing offset X or as a relative timing offset to be added or subtracted from the current value of X .

Timing Uncertainty

In the timing correction offset burst the SAN 6 transmits to the MAN 2, together with the timing offset, a timing uncertainty rate R_U indicating the rate at which the timing of the MAN 2 is likely to change. For example, the timing uncertainty rate may represent a number of symbols per second by which the MAN 2 is likely to change its timing. The SAN 6 determines the timing uncertainty rate from the class of the MAN 2 (e.g. land mobile, aeronautical) and other factors such as the inclination of the orbit of the satellite 6.

The MAN 2 times the interval elapsed since the last timing correction was received and multiplies this by the timing uncertainty rate R_U to give a timing uncertainty t_U , where

$$t_U = \text{MIN}(T - T_C \times R_U, 40 \text{ ms}) \quad (2)$$

where T is the current time and T_C is the time at which the last correction was received.

- 5 The MIN function means that the timing uncertainty cannot exceed the maximum uncertainty of 40 ms.

The timing offset X is reduced by the timing uncertainty t_U such that:

$$X = \text{MIN}(X_C - t_U, 0) \quad (3)$$

- where X_C is the initial value of X indicated in the last timing correction, the MIN function
10 ensuring that X cannot fall below zero.

- Figure 8b illustrates the transmission timing of one of the MAN's 2 with timing uncertainty. Steps 80 to 84 correspond to those shown in Figure 8a and their description will not be repeated. At step 86, the MAN 2 calculates the MESP return schedule as starting $(120 + X)$ ms after the beginning of reception of the subframe SF, using the value
15 of X as reduced by the timing uncertainty t_U . As a result of the timing uncertainty t_U , the MAN 2 must ignore the first I slots of a random access group, where

$$I = \text{INT}[(t_S - t_G + t_U)/t_S] \quad (4)$$

t_S is the slot duration of 5 ms and t_G is the guard time $G1$, which is 6 symbol periods in this case.

- 20 In the example shown in Figure 8b, there are four 5 ms slots at the start of the MESP return schedule, but t_U is 7 ms, so that the first two slots must be ignored. The MAN 2 can then only transmit in the third and fourth slots.

- If the timing uncertainty t_U is greater than a predetermined value, such as the value of the guard time, the MAN 2 reverts to the random access timing correction request
25 process shown in Figure 7 and inhibits transmission in time slots allocated exclusively to itself, except where a sufficient number of these are concatenated so that their total length can accommodate both the timing uncertainty and the burst itself, until a new timing correction offset has been received from the SAN 6. However, the protocol differs from that of Figure 7 in that the MAN 2 uses its current timing offset X instead of returning to
30 the default value of 40 ms in step 76. This protocol reduces the chance of interference between bursts in allocated slots.

In the above embodiment, the timing offset X is reduced by the timing uncertainty t_U for all transmissions by the MAN 2. In an alternative embodiment, the timing offset X is reduced by the timing uncertainty t_U only for transmissions by the MAN 2 in random access slots, while the original timing offset X_C received in the last timing correction message from the SAN 6 is applied when transmitting in allocated slots. In this alternative embodiment, it is important to distinguish between timing correction messages initiated by the SAN 6, after detection of a transmission by the MAN 2 in an allocated slot too close to the slot boundary, and timing correction messages sent by the SAN 6 in response to a timing correction request by the MAN 2, which will have a different timing offset from the transmissions in allocated slots. Therefore, the SAN 6 indicates in the timing correction message whether this is being sent in response to a request by the MAN 2, or was initiated by the SAN 6. The MAN 2 then determines the new timing offset X_C from the timing offset indicated in the timing correction message according to how the timing correction message was initiated.

Unique Word Structure

As shown in Figures 6a and 6b, each MESP burst includes an initial unique word UW1 and a final unique word UW2. This format is particularly advantageous for TDMA channels with short guard times between slots. By way of comparison, Figures 9a to 9c show a conventional burst structure with initial unique word only, respectively with no collision, two-burst collision and three-burst collision, while Figures 10a to 10c show the equivalent situations with both an initial and final UW structure.

As shown in Figure 9b, if burst 2 transmitted in slot 2 is delayed because of timing error, the data contents of burst 2 interfere with the UW of burst 3 in slot 3 and may both be corrupted, possibly preventing the data contents of burst 3 from being read correctly as a result of a failure to acquire the symbol timing of burst 3. However, in the situation shown in Figure 10b, the final UW of burst 2 interferes with the initial UW of burst 3, but in both bursts the data and one of the unique words is uncorrupted, giving a good chance of reading both data bursts.

In the situation shown in Figure 9c, burst 2 is delayed and burst 4 is advanced, both as a result of timing errors. The data content of bursts 2 and 3, and the unique words of

bursts 3 and 4, are corrupted so that it will be difficult to read any of the data contents of bursts 2 to 4. In contrast, in the situation shown in Figure 10c, the final UW of burst 2, both unique words of burst 3 and the initial unique word of burst 4 are corrupted. Nevertheless, if the timing of bursts 2 and 4 can be acquired from the uncorrupted unique words, the corrupted unique words of bursts 2 and 4 can be synthesised and subtracted from the received signal of burst 3, allowing the corrupted unique words of burst 3 to be recovered and the data content of burst 3 to be read successfully.

The use of two unique words per burst also provides the advantages of time diversity: in the presence of fading or impulsive noise, the chance of two separate unique words being corrupted is less than that of one unique word of the combined length. The two unique words can be detected independently and the results combined before a timing decision is made.

In order to demodulate a received burst, the SAN 6 needs to estimate the carrier amplitude, phase and frequency. The estimated channel state is also used by the decoder 38a/38b. Since there is an UW present at both the beginning and end of each burst, the channel state at both the beginning and end of the burst can be determined, and optionally the channel state throughout the burst can be interpolated from these. This may result in improved demodulation and decoding performance. Furthermore, timing slip between the beginning and the end of the data burst can be detected; this is advantageous where there is considerable drift in the transmitter or receiver clock. Commonly, the channel state cannot be estimated from the data burst itself, because the energy of the data portion is typically too low.

As a further advantage, the proposed unique word structure gives improved performance with high-power amplifiers (HPA). A common problem with HPA's is their slow ramp-up/down at the beginning and end of a burst. This may result in distortion or attenuation of symbols at the start and end of a burst. If these symbols were carrying encoded data, their distortion could lead to loss of the whole encoded data in the burst. With the proposed structure, only some of the UW symbols will be distorted, which is less likely to cause loss of the whole burst.

As a less advantageous alternative, additional fields may be transmitted in each burst either before the initial UW or after the final UW of the burst, or both. The additional

fields may be additional data fields carrying additional data or signalling, or may carry further burst format signals designed to assist in the demodulation and/or decoding of the data content of the burst. However, such additional fields are vulnerable to interference and preferably should not carry data or signalling essential for demodulation and/or decoding of the burst.

The above embodiments have been described with reference to certain Inmarsat™ systems purely by way of example and aspects of the present invention are in no way limited thereto. For example, it will be readily understood to the skilled person that the problem of timing correction occurs in geo-stationary, geosynchronous and non-geostationary satellite systems and aspects of the present invention are applicable to these systems. Moreover, timing errors can occur for reasons such as clock instability as well as relative movement between satellites, base stations and wireless transceivers, so that aspects of the present invention are also applicable to wireless communication systems not using satellites as relay stations, such as terrestrial communications systems or systems involving alternative relay stations such as balloons or other aircraft.

Although the above embodiments have been described with reference to a TDMA channel format, it will be readily understood by the skilled person that the problem of interference as a result of timing error can occur with other channel formats, such as combined TDMA-CDMA, slotted Aloha and other time-divided formats and that aspects of the present invention are also applicable to such formats.

The description of the above embodiments includes a detailed description of the transmission formats of LESP and MESP channels. Aspects of these channel formats are particularly advantageous for packet data transmission via satellite, particularly via geostationary satellite and have been selected after considerable investigation of alternative formats, but may also be advantageous in different contexts. On the other hand, it will be apparent that some aspects of the present invention are entirely independent of the specific channel formats used.

While the apparatus of the specific embodiments has been described in terms of functional blocks, these blocks do not necessarily correspond to discrete hardware or software objects. As is well known, most baseband functions may in practice be performed

by suitably programmed DSP's or general purpose processors and the software may be optimised for speed rather than structure.

CLAIMS

1. A method of controlling the transmission timing of a wireless transceiver in a wireless communications system, including:

5 receiving a burst transmission from the transceiver on a time-slotted channel, the burst transmission including a time slot indication indicating a time slot within which the burst was transmitted;

calculating from the timing of reception of said burst transmission a timing correction value for the transceiver so as to synchronise the transmission timing of said transceiver with a reference timing; and
10 transmitting said timing correction value to the transceiver.

2. A method as claimed in claim 1, further including, prior to said receiving step:

15 transmitting to the transceiver a time slot allocation indicating a plurality of slots in the channel; wherein the time slot indication indicates one of said time slots.

3. A method as claimed in claim 1 or claim 2, wherein said plurality of time slots form a sequential block having a total length greater than the maximum variation in propagation delay in said wireless communications system.
20

4. A method of controlling the transmission timing of a wireless transceiver in a wireless communications system, including:
25

selecting a time slot in a time-slotted channel;

transmitting from the transceiver a burst transmission in said selected time slot, the transmission including a time slot indication indicating the selected time slot;

receiving at the transceiver a timing correction value derived from the timing of the burst transmission; and

adjusting the timing of a subsequent transmission by the transceiver according to said timing correction value.

5

5. A method as claimed in claim 4, further including:

receiving at the transceiver a time slot allocation indicating a plurality of time slots in the channel; wherein the selected time slot is selected from said plurality of time slots.

10

6. A method as claimed in claim 4 or 5, wherein said selected time slot is selected randomly or pseudo-randomly.

15

7. A method of controlling the transmission timing of a wireless transceiver in a wireless communications system, including:

transmitting a burst transmission from the transceiver;

receiving at the transceiver a timing correction value; and

controlling a subsequent transmission by the transceiver according to the timing correction value and according to a timing uncertainty value as a function of time elapsed since reception of the timing correction value.

20

8. A method as claimed in claim 7, wherein the timing uncertainty value is determined by a timing uncertainty rate received by the transceiver.

25

9. A method as claimed in claim 7 or claim 8, wherein if the timing uncertainty value exceeds a predetermined limit, the transceiver is inhibited from transmission in a time slot allocated to that transceiver until a further timing correction value is received.

10. A method of controlling the transmission timing of a transceiver in a wireless communications system, including:

transmitting to said transceiver a channel allocation signal indicating a channel dedicated that transceiver and not available to other transceivers in said system;

receiving from said transceiver a transmission substantially in the dedicated channel allocation;

detecting a timing error in said transmission; and

transmitting to said one of said transceivers a timing correction signal dependent on said timing error, for correction of the transmission timing of said transceiver.

11. A wireless link signal comprising a data burst including in temporal sequence:

an initial predetermined synchronisation sequence;

a data field carrying the data content of the burst; and

a final predetermined synchronisation sequence.

12. A wireless link signal comprising a data burst including in temporal sequence:

a first predetermined synchronisation sequence;

a data field carrying substantially all of the data content of the burst;

and

a second predetermined synchronisation sequence.

13. A signal as claimed in claim 11 or 12, wherein the burst includes an initial preamble preceding the first synchronisation sequence.

14. A signal as claimed in any one of claims 11 to 13, wherein the burst is transmitted in a time-slotted channel.

5 15. A signal as claimed in claim 14, wherein the channel comprises a plurality of slots sequentially separated by a guard band, wherein the length of the guard band is less than the maximum relative timing error between transmissions in adjacent time slots.

10 16. A method of transmitting a signal over a wireless link, comprising transmitting a signal as claimed in any one of claims 11 to 15.

17. A method of receiving a signal over a wireless link, comprising receiving a signal as claimed in any one of claims 11 to 15.

15 18. A method of transmitting data over a wireless communications link, comprising:

detecting a timing reference signal;

receiving a timing slot allocation over the wireless communications link;

20 and transmitting said data according to said timing reference signal and said timing slot allocation, in a time-slotted channel having a format including periodic blocks of constant length each occupied by either one long burst or an integral number of short bursts of equal length.

25 19. A method of controlling the transmission of data over a time-divided multiple access channel of a wireless communications link, comprising:

determining an allocation scheme of said channel to each of a plurality of transceivers, and transmitting said allocation scheme to said transceivers,

whereby said transceivers transmit data in said channel with a format including periodic blocks of constant length each occupied by either one long burst or an integral number of short bursts of equal length.

- 5 20. A wireless link signal having a format including periodic blocks of constant length each occupied by either one long burst or an integral number of short bursts of equal length.

- 10 21. A method of transmitting data over a wireless communications link, comprising:

transmitting the data in one or more short bursts and/or one or more long bursts, the short bursts comprising 112 modulated data symbols and having a total length of approximately 5 ms, and the long bursts comprising 596 data symbols and having a total length of approximately 20 ms.

- 15 22. A signal comprising a burst transmission having a total length of approximately either 5 or 20 ms and comprising 112 or 596 data symbols respectively.

- 20 23. Apparatus arranged to perform the method of any one of claims 1 to 10, 16 to 19 or 21.

24. A method substantially as herein described with reference to Figures 7, 8a and 8b of the accompanying drawings.

- 25 25. A signal substantially as herein described with reference to Figure 5 or Figure 6 of the accompanying drawings.

ABSTRACT
COMMUNICATION METHODS AND APPARATUS

5 In a wireless communications system, transceivers transmit short bursts to a base station, which determines timing corrections from the time of receipt of the burst and transmits the timing corrections to the respective transceivers. In one aspect, the base station indicates to the transceivers a plurality of time slots, each transceiver selects one of the time slots at random, formats a burst including an indicator of the selected time slot and transmits
10 the burst in that slot. In another aspect, the base station transmits to each transceiver a timing uncertainty value, which determines how the timing correction will be modified by the transceiver as the interval since last receiving a timing correction increases. Data bursts are transmitted in a format comprising a first unique word, a content field and a second unique word, in that order. The bursts are transmitted in a TDMA channel format
15 which can accommodate both short and long bursts in a block format of constant periodicity.

20

[Figure 6a]

Fig. 1

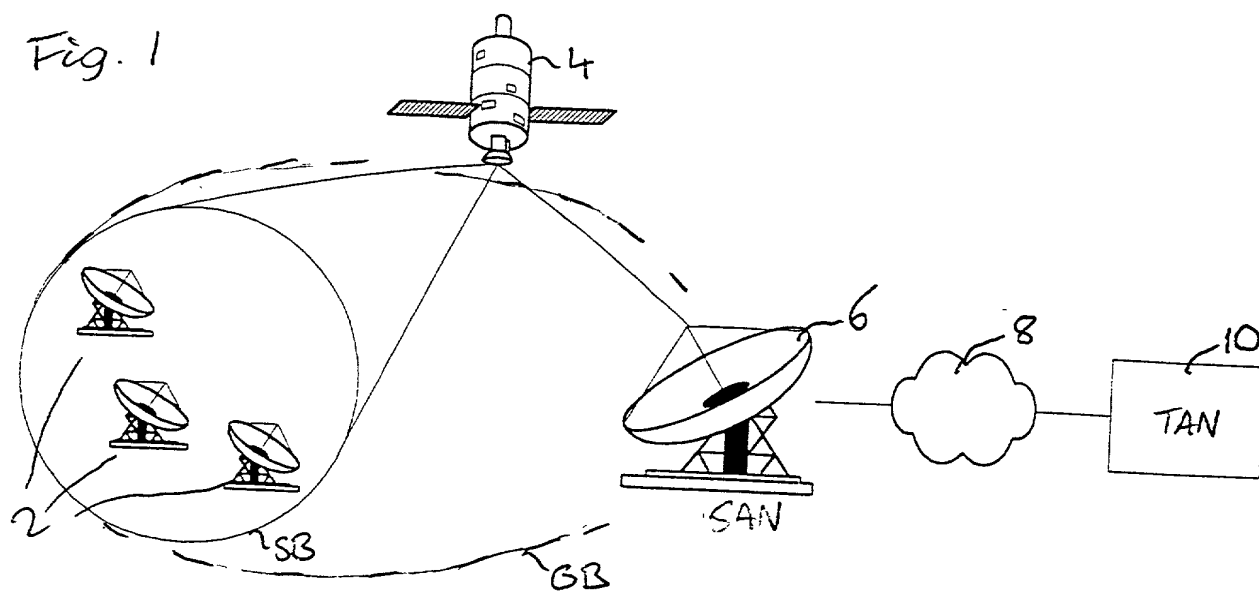


Fig. 2



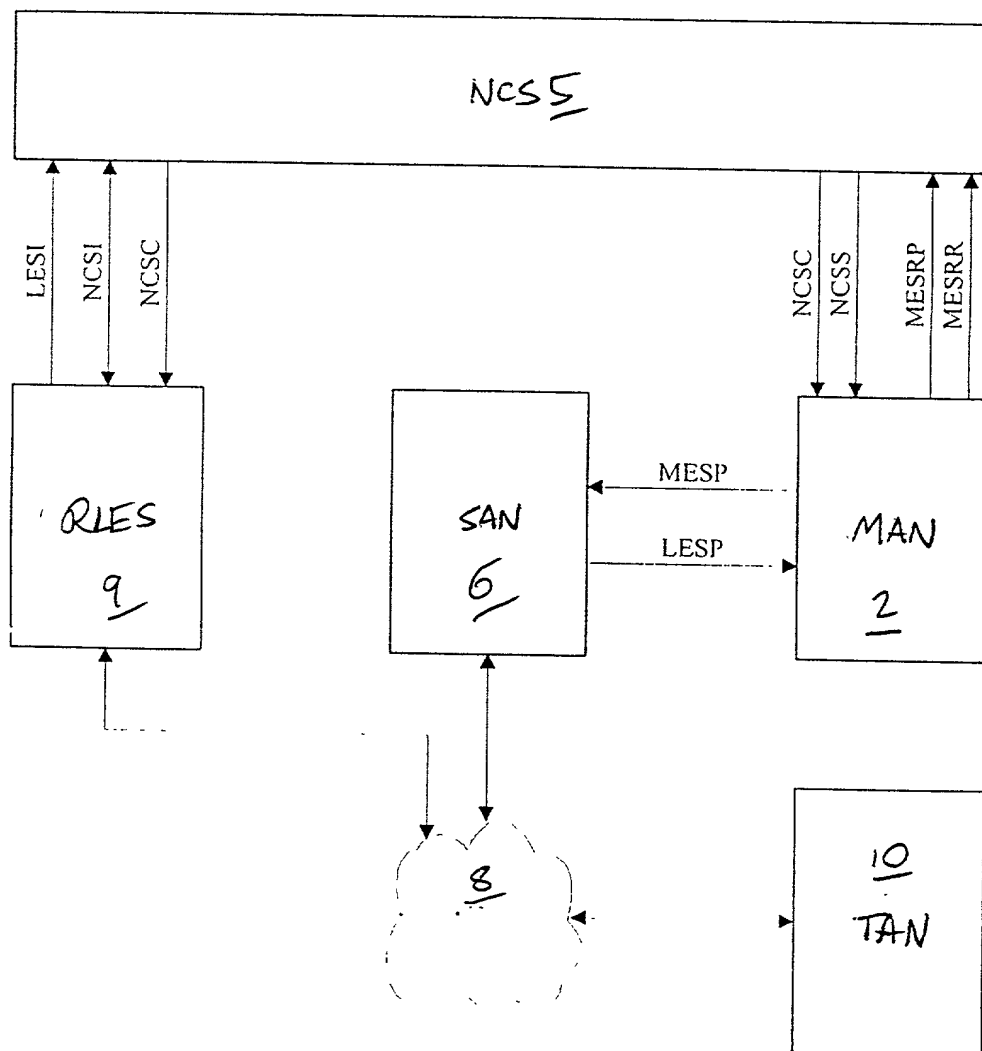


Fig. 3

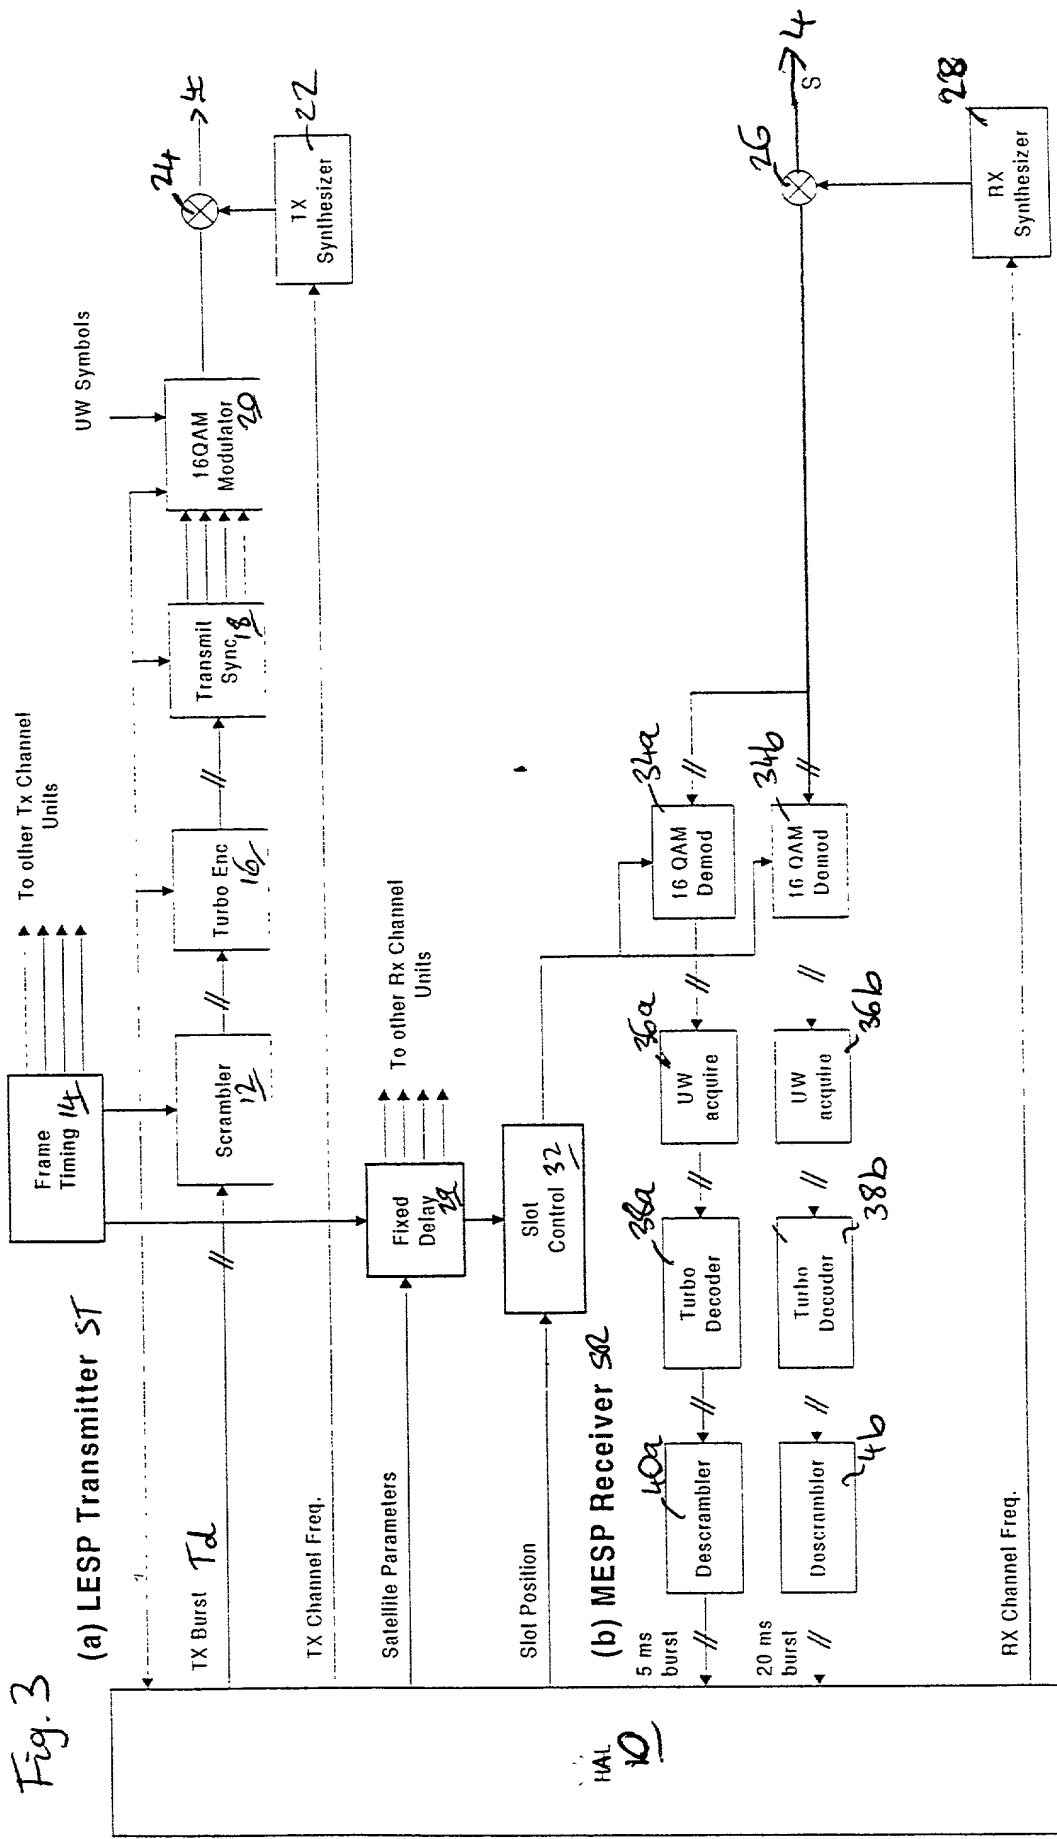

—#— : Parallel Interface

3/10

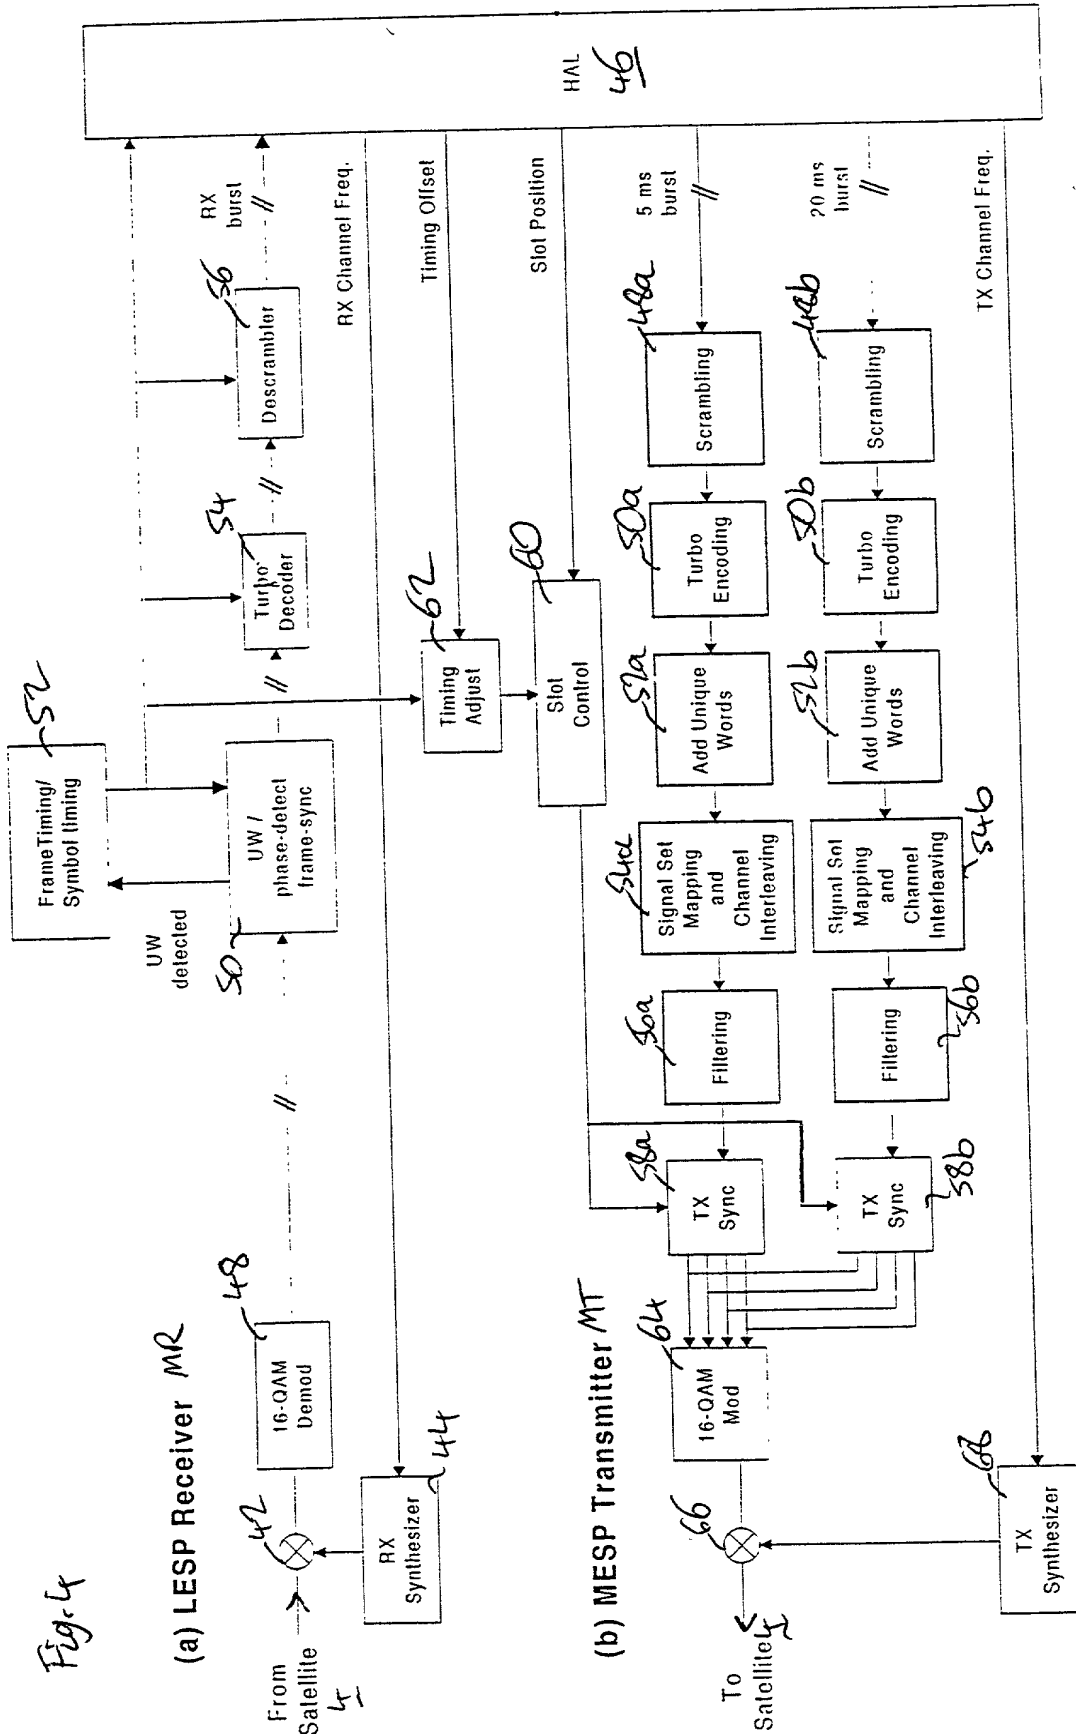

—#— : Parallel interface

Fig. 5a

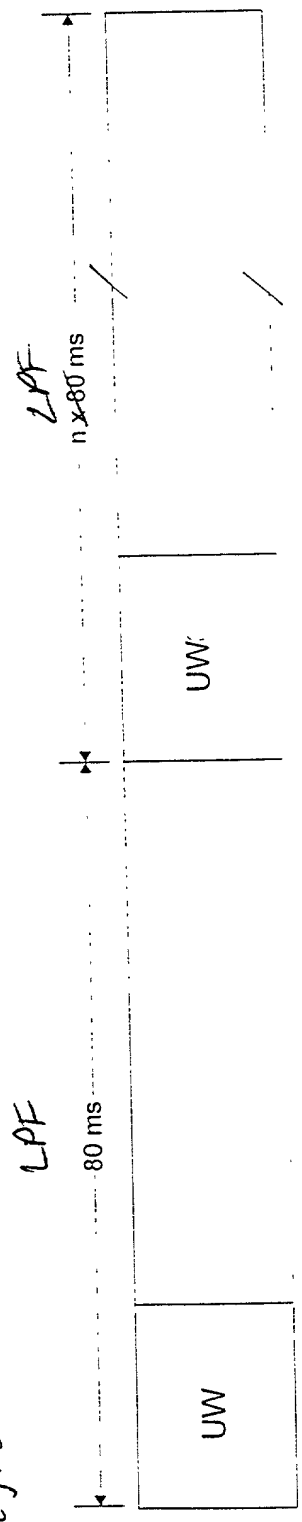


Fig. 5b

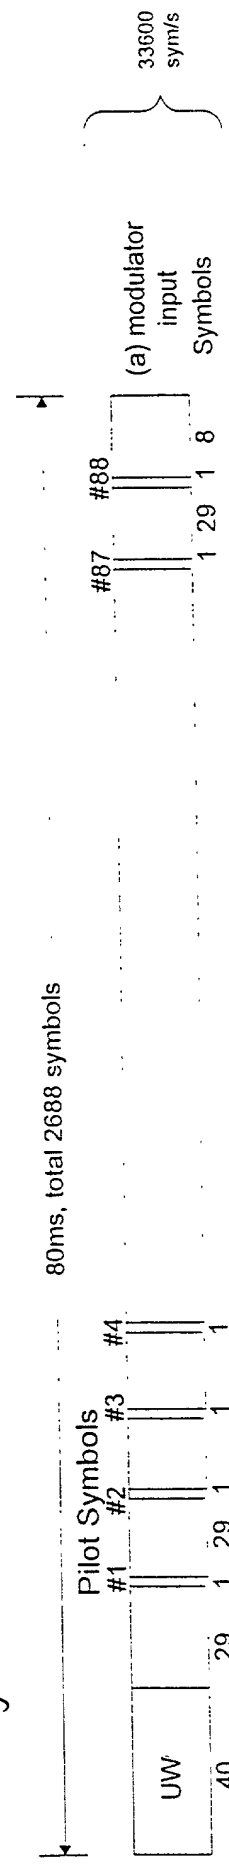


Fig 5c

5F1

5F2

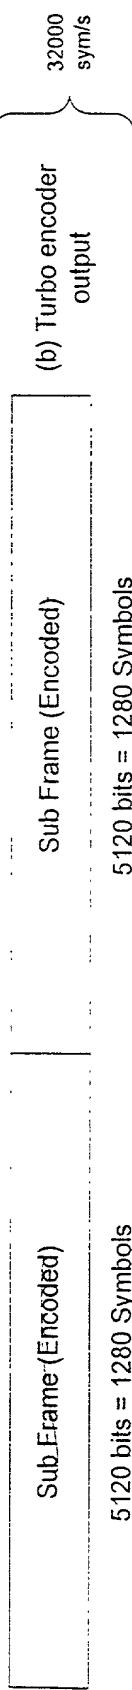


Fig 5d

IB1

IB2



(c) Turbo encoder input

Fig. 6a


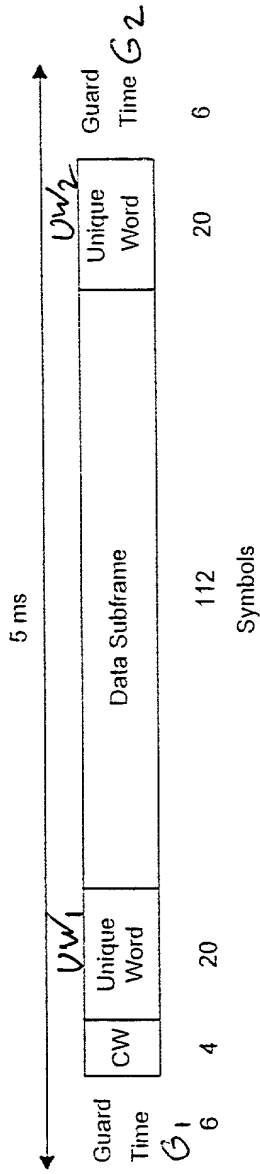


Fig. 6b

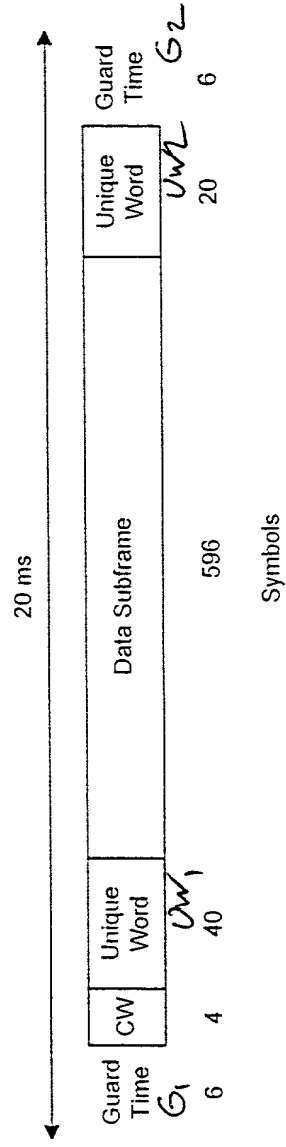

[illegible]

8/10

Fig. 8a


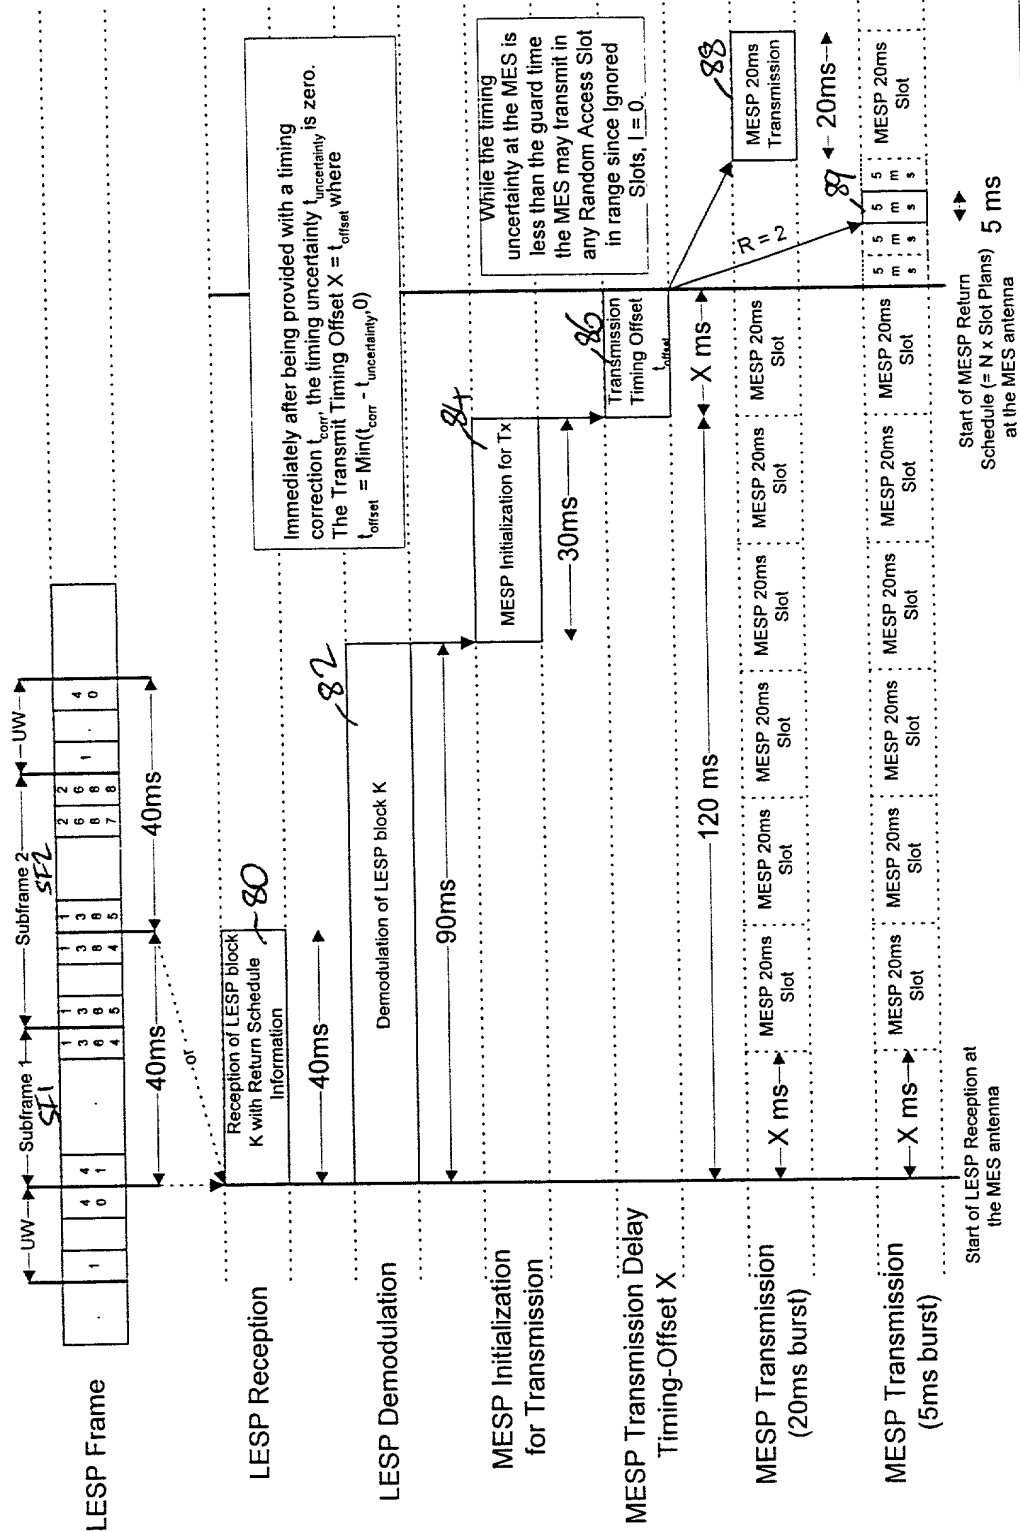


Fig. 8b

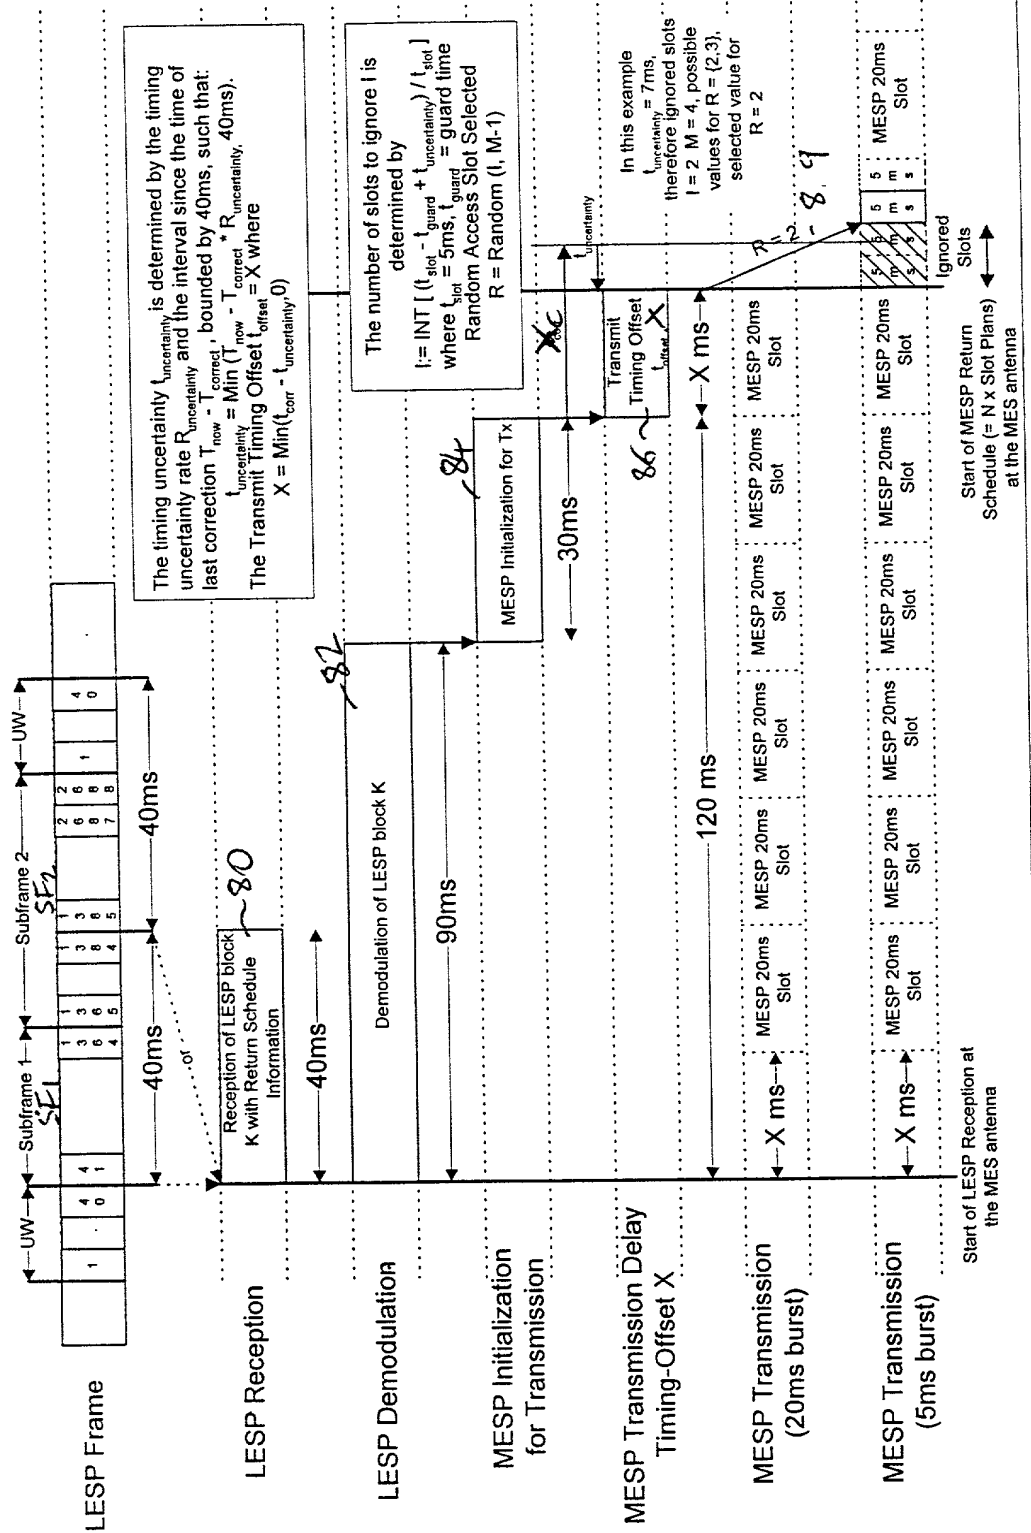

10/10

Fig. 9a

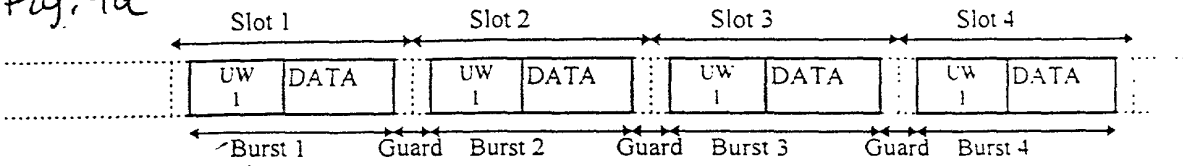


Fig. 9b

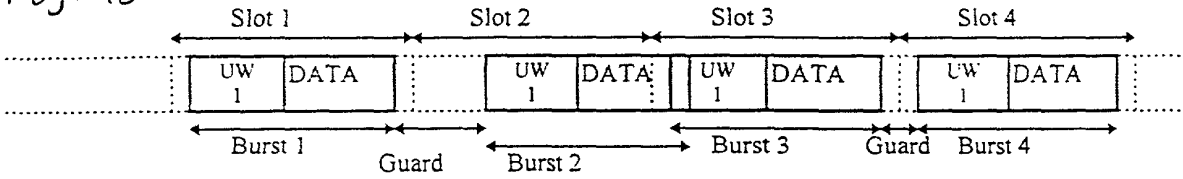


Fig. 9c

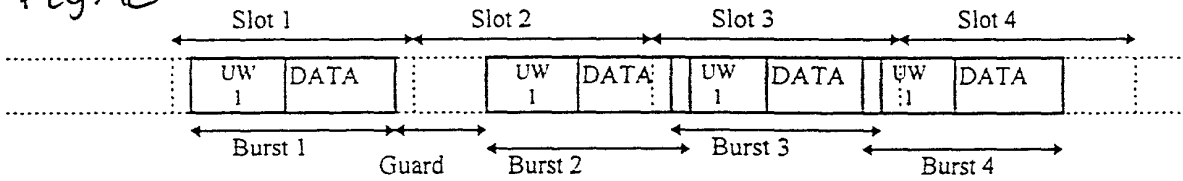


Fig. 10a


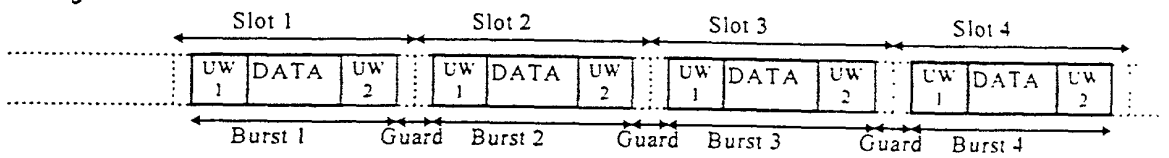


Fig. 10b



Fi.

Fig. 10c

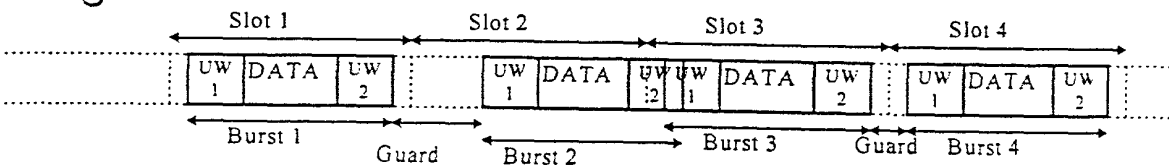